


	CP_03-0_Bemaßungsrichtlinie	()	Auxiliary dimension DIN 406-10		Theoretical dimension ISO 1101
	 Test dimension (SPC)	[]	Unfinished dimension DIN 406-10		Surface quality ISO 1302
24-8950-037	Designed by Wetzlmaier Gerlinde 2025/11/19		Checked by Livinschi Gabriela 2025/11/21		Approved by Grininger David 2025/11/21
	 Designation MultiLED V Stp/Tail/DI/Rev/Fog/ 8p. RH Drawing Nr. 24895003 Business Unit SALES - 12				 Project number -
Part Number	 Dimensions in mm				Weight -
	Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication there of to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.				Scale not in scale
	Tolerance CP_04-2_Toleranzen Verkabelungsprodukte				Sheet 1 / 1

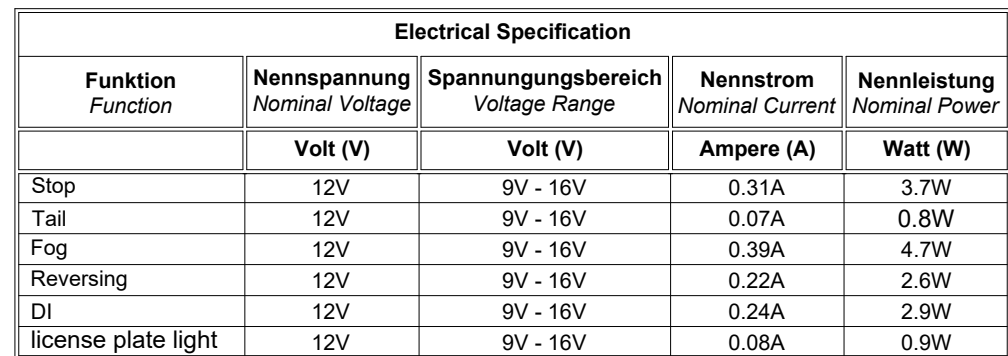

FUNCTION:		
Blinker RH LED	<i>DI RH LED</i>	A
Bremse LED	<i>Stop LED</i>	B
Rücklicht RH LED	<i>Tail RH LED</i>	C
Nebelschl. LED	<i>Fog LED</i>	D
Rückfahrh. LED	<i>Reverse LED</i>	E

Homologation description									
H.1	E9 23532	L 2a	R1-S1 00	F1 00	AR 00	IIIA 00	148R 00	150R 00	
H.2	E9 24789	10R 06							