
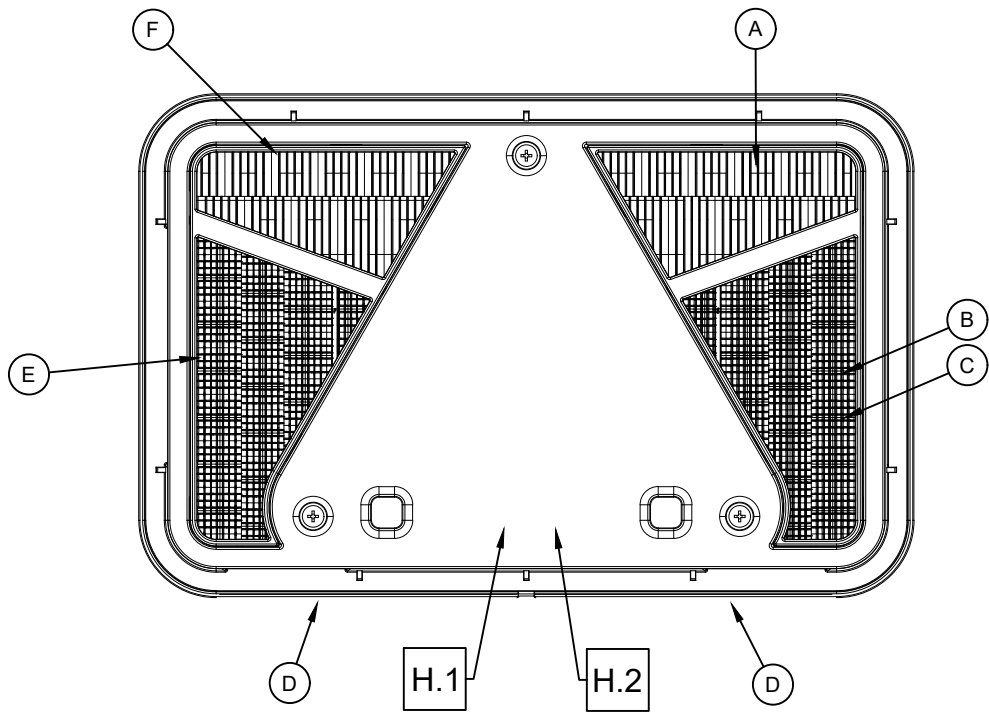


CP_03-0_Bemaßungsrichtlinie		()	Auxiliary dimension DIN 406-10			Theoretical dimension ISO 1101		
 Test dimension (SPC)		[]	Unfinished dimension DIN 406-10			Surface quality ISO 1302		
Designed by		Checked by		Approved by				
Wetzlmaier Gerlinde 2025/11/18		Livinschi Gabriela 2025/11/21		Grininger David 2025/11/21				
24-8950-087			Designation MultiLED V Stp/Tail/DI/Rev/Fog/Low LPL cbl RH				Project number -	
			Drawing Nr. 24895008		Tolerance CP_04-2_Toleranzen Verkabelungsprodukte	Weight -	Scale not in scale	
			Business Unit SALES - 12					
		 Dimensions in mm	Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication there of to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.				Level R01	Sheet 1 / 1

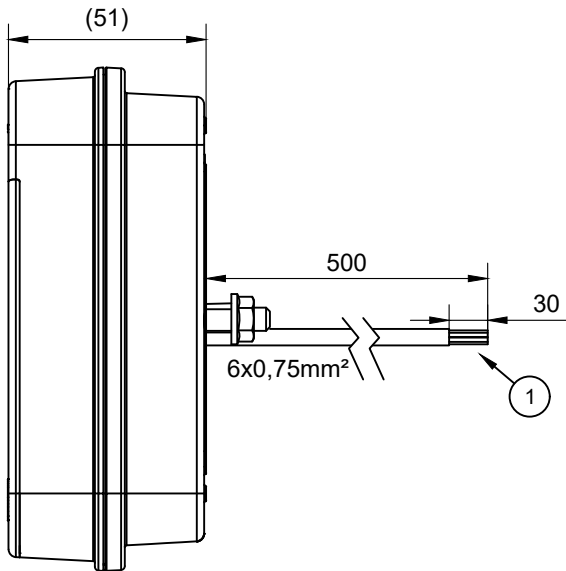

Electrical Specification				
Funktion Function	Nennspannung Nominal Voltage	Spannungsbereich Voltage Range	Nennstrom Nominal Current	Nennleistung Nominal Power
	Volt (V)	Volt (V)	Ampere (A)	Watt (W)
Stop	12V	9V - 16V	0.31A	3.7W
Tail	12V	9V - 16V	0.07A	0.8W
Fog	12V	9V - 16V	0.39A	4.7W
Reversing	12V	9V - 16V	0.22A	2.6W
DI	12V	9V - 16V	0.24A	2.9W
license plate light	12V	9V - 16V	0.08A	0.9W

FUNCTION:	
Blinker RH LED <i>DI RH LED</i>	A
Bremse LED <i>Stop LED</i>	B
Rücklicht RH LED <i>Tail RH LED</i>	C
Kennzeichenlicht <i>license plate function</i>	D
Nebelschl. LED <i>Fog LED</i>	E
Rückfahrl. LED <i>Reverse LED</i>	F