
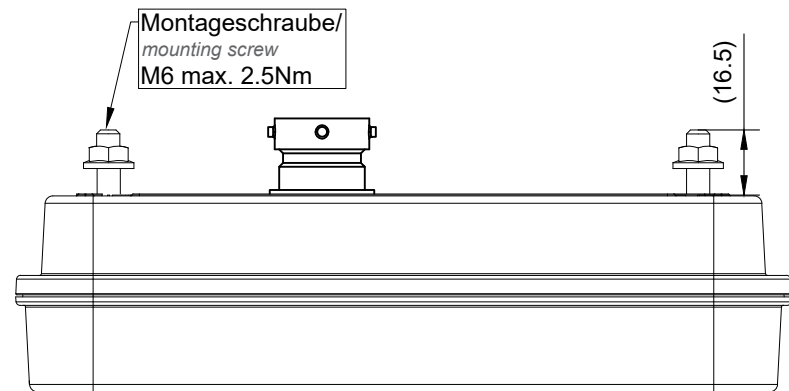



Level	Zone	ECI Nº.	Revision note	Date	Designed	Checked

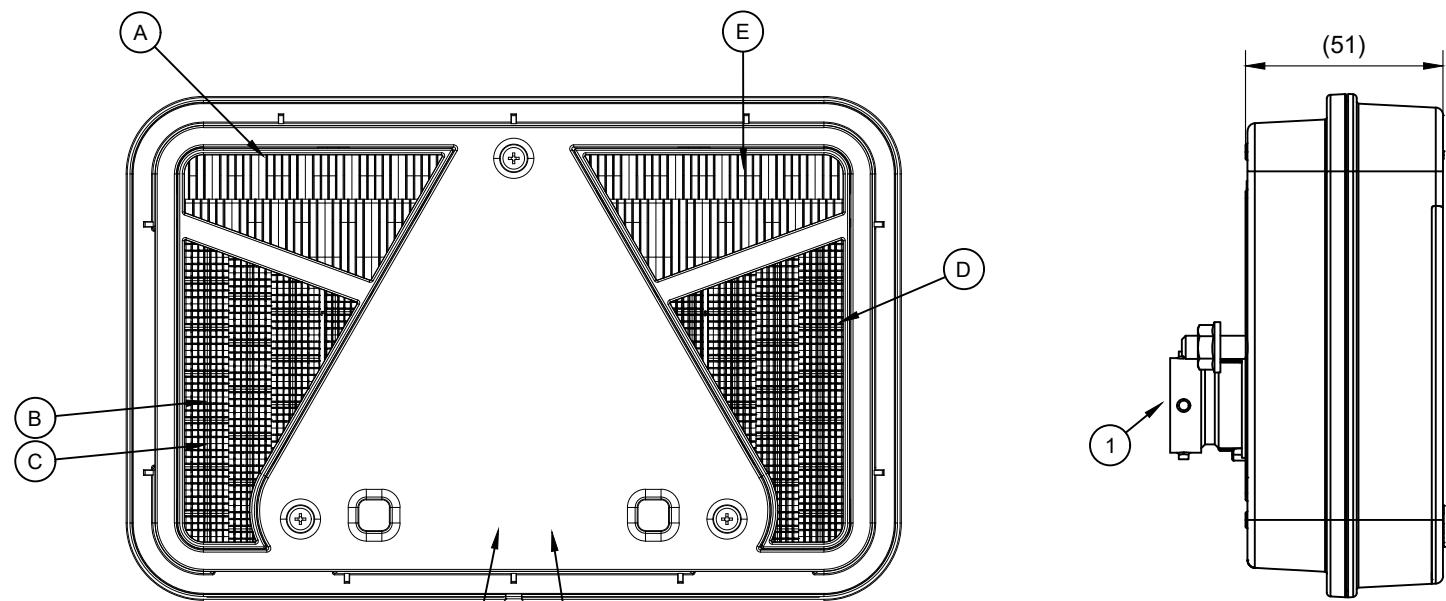

	①	
function	pin	wire colour
Blinker LH <i>DI LH</i>	1	gelb <i>yellow</i>
Nebelschl. <i>Fog</i>	2	blau <i>blue</i>
Masse <i>GND</i>	3	weiss <i>white</i>
<i>NO FUNCTION</i>	4	-
<i>NO FUNCTION</i>	5	-
Bremse <i>Stop</i>	6	rot <i>red</i>
Rücklicht LH <i>Tail LH</i>	7	schwarz <i>black</i>
Rückfahrl. <i>Reverse</i>	8	grau <i>grey</i>

FUNCTION:		
Blinker LH LED <i>DI LH LED</i>		A
Bremse LED <i>Stop LED</i>		B
Rücklicht LH LED <i>Tail LH LED</i>		C
Nebelschl. LED <i>Fog LED</i>		D
Rückfahrh. LED <i>Reverse LED</i>		E

Homologation description									
H.1	E9 23532	L 2a	R1-S1 00	F1 00	AR 00	IIIA 00	148R 00	150R 00	
H.2	E9 24789	10R 06							

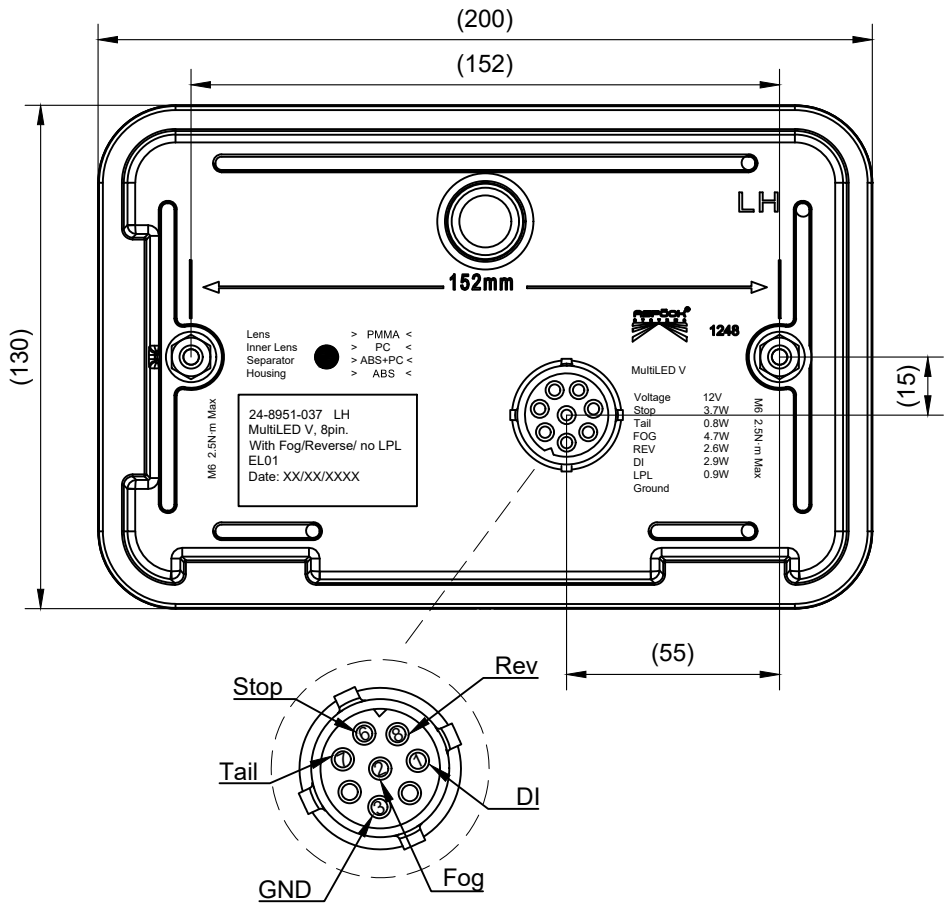

Electrical Specification				
Funktion <i>Function</i>	Nennspannung <i>Nominal Voltage</i>	Spannungsbereich <i>Voltage Range</i>	Nennstrom <i>Nominal Current</i>	Nennleistung <i>Nominal Power</i>
	Volt (V)	Volt (V)	Ampere (A)	Watt (W)
Stop	12V	9V - 16V	0.31A	3.7W
Tail	12V	9V - 16V	0.07A	0.8W
Fog	12V	9V - 16V	0.39A	4.7W
Reversing	12V	9V - 16V	0.22A	2.6W
DI	12V	9V - 16V	0.24A	2.9W
license plate light	12V	9V - 16V	0.08A	0.9W

		CP_03-0_Bemaßungsrichtlinie	()	Auxiliary dimension DIN 406-10		Theoretical dimension ISO 1101		
		 Test dimension (SPC)	[]	Unfinished dimension DIN 406-10		Surface quality ISO 1302		
		Designed by		Checked by		Approved by		
		Wetzlmaier Gerlinde 2025/11/18		Livinschi Gabriela 2025/11/21		Grininger David 2025/11/21		
24-8951-037			Designation MultiLED V Stp/Tail/DI/Rev/Fog/ 8p. LH				 Project number -	
			Drawing Nr. 24895103		Tolerance CP_04-2_Toleranzen Verkabelungsprodukte		Weight -	Scale not in scale
			Business Unit SALES - 12					
Part Number	 Dimensions in mm	Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication there of to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.					Level R01	Sheet 1 / 1