
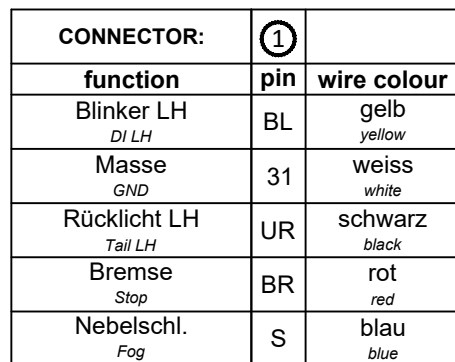


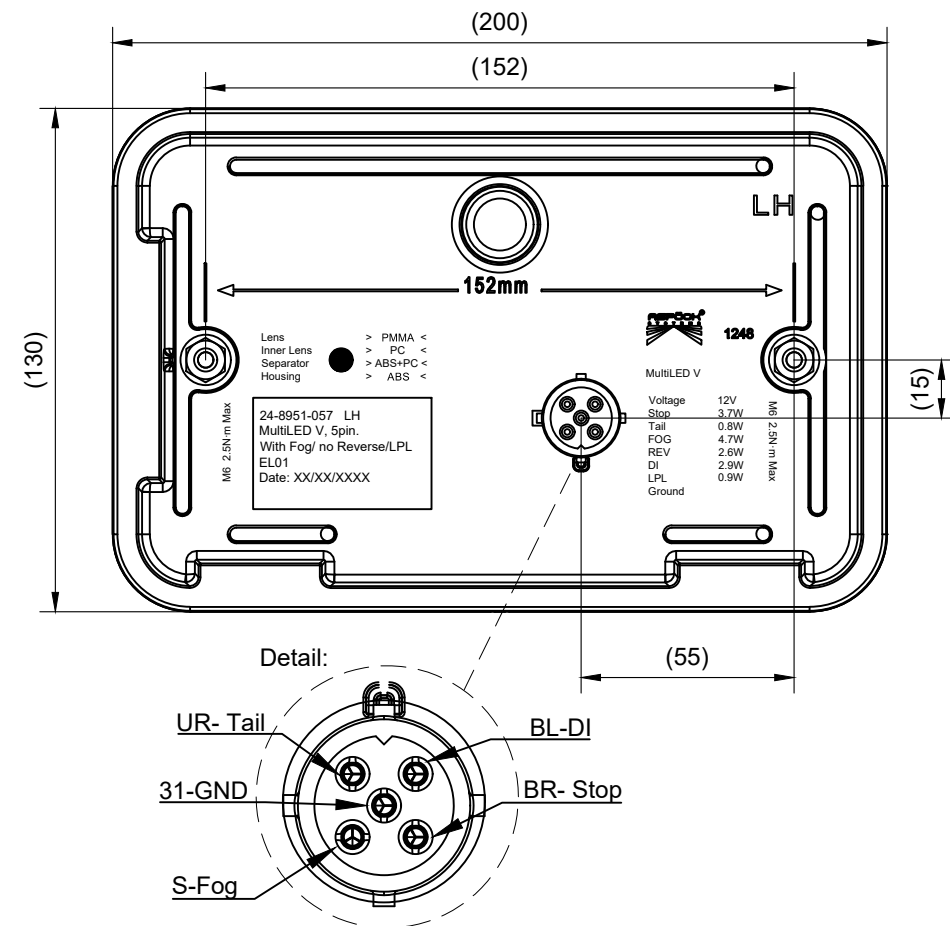

Electrical Specification				
Funktion <i>Function</i>	Nennspannung <i>Nominal Voltage</i>	Spannungsbereich <i>Voltage Range</i>	Nennstrom <i>Nominal Current</i>	Nennleistung <i>Nominal Power</i>
	Volt (V)	Volt (V)	Ampere (A)	Watt (W)
Stop	12V	9V - 16V	0.31A	3.7W
Tail	12V	9V - 16V	0.07A	0.8W
Fog	12V	9V - 16V	0.39A	4.7W
Reversing	12V	9V - 16V	0.22A	2.6W
DI	12V	9V - 16V	0.24A	2.9W
license plate light	12V	9V - 16V	0.08A	0.9W

Homologation description									
H.1	E9 23532	L 2a	R1-S1 00	F1 00	AR 00	IIIA 00	148R 00	150R 00	
H.2	E9 24789	10R 06							

FUNCTION:	
Blinker LH LED <i>DI LH LED</i>	A
Bremse LED <i>Stop LED</i>	B
Rücklicht LH LED <i>Tail LH LED</i>	C
Nebelschl. <i>Fog</i>	D

CP_03-0_Bemaßungsrichtlinie () Auxiliary dimension DIN 406-10 ☐ Theoretical dimension ISO 1101		☐ Test dimension (SPC) [] Unfinished dimension DIN 406-10 ☒ Surface quality ISO 1302		
Designed by Wetzlmaier Gerlinde 2025/11/19		Checked by Livinschi Gabriela 2025/11/21		
Approved by Grininger David 2025/11/21				
24-8951-057			Designation MultiLED V Stp/Tail/DI/Fog/ 5p. LH	
	Drawing Nr. 24895105		Tolerance CP_04-2_Toleranzen Verkabelungsprodukte	
	Business Unit SALES - 12			
	 Dimensions in mm		Project number -	
Part Number	Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.		Weight -	Scale not in scale
			Level R01	Sheet 1 / 1