

A

B

C

D

E

F

A

B





C

D

E

F

Level	Zone	ECI N°.	Revision note	Date	Designed	Checked

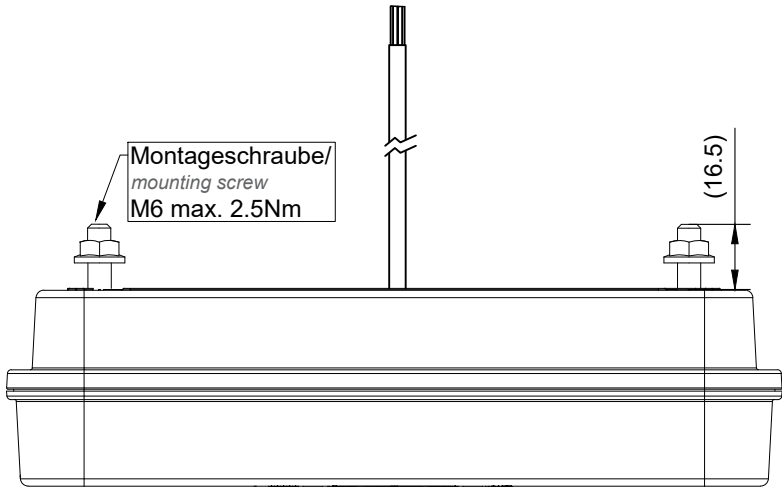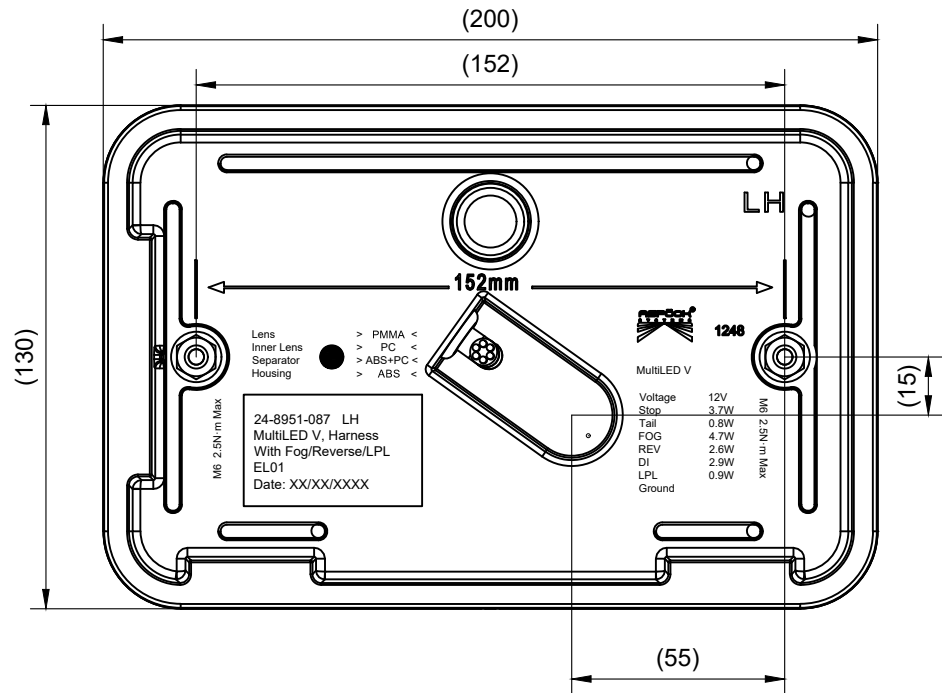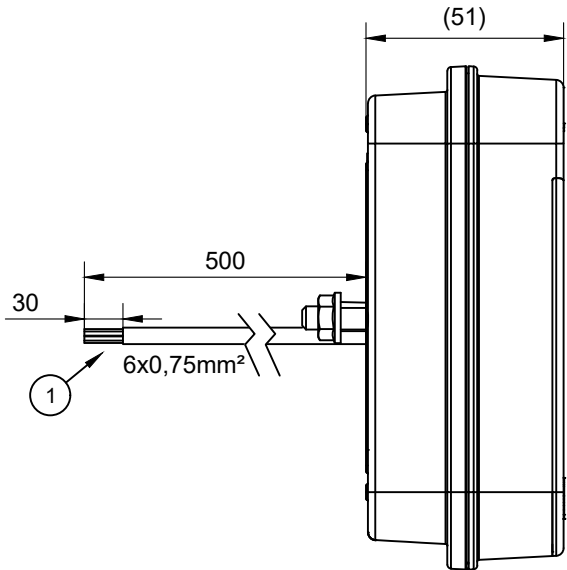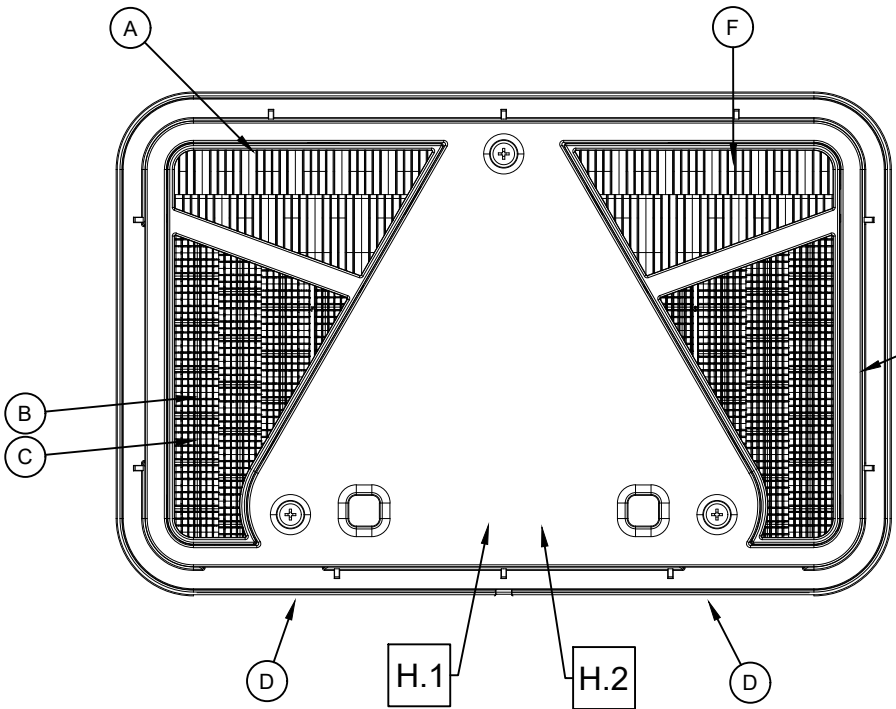

CONNECTOR:	①
function	wire colour
Blinker LH <i>DI LH</i>	gelb <i>yellow</i>
Nebelschl. <i>Fog</i>	blau <i>blue</i>
Masse <i>GND</i>	weiss <i>white</i>
Rücklicht LH inkl. KZ <i>Tail LH incl. LPL</i>	schwarz <i>black</i>
Bremse <i>Stop</i>	rot <i>red</i>
Rückfahrl. <i>Reverse</i>	grau <i>grey</i>

Electrical Specification				
Funktion <i>Function</i>	Nennspannung <i>Nominal Voltage</i>	Spannungsbereich <i>Voltage Range</i>	Nennstrom <i>Nominal Current</i>	Nennleistung <i>Nominal Power</i>
	Volt (V)	Volt (V)	Ampere (A)	Watt (W)
Stop	12V	9V - 16V	0.31A	3.7W
Tail	12V	9V - 16V	0.07A	0.8W
Fog	12V	9V - 16V	0.39A	4.7W
Reversing	12V	9V - 16V	0.22A	2.6W
DI	12V	9V - 16V	0.24A	2.9W
license plate light	12V	9V - 16V	0.08A	0.9W

Homologation description									
H.1	E9 23532	L 2a	R1-S1 00	F1 00	AR 00	IIIA 00	148R 00	150R 00	
H.2	E9 24789	10R 06							

FUNCTION:	
Blinker LH LED <i>DI LH LED</i>	A
Bremse LED <i>Stop LED</i>	B
Rücklicht LH LED <i>Tail LH LED</i>	C
Kennzeichenlicht <i>license plate function</i>	D
Nebelschl. LED <i>Fog LED</i>	E
Rückfahrl. LED <i>Reverse LED</i>	F

CP_03-0_Bemaßungsrichtlinie () Auxiliary dimension DIN 406-10		Theoretical dimension ISO 1101	
Test dimension (SPC) [] Unfinished dimension DIN 406-10		Surface quality ISO 1302	
Designed by Wetzlmaier Gerlinde 2025/11/17		Checked by Livinschi Gabriela 2025/11/21	
Approved by Grininger David 2025/11/21		Project number -	
Designation MultiLED V Stp/Tail/DI/Rev/Fog/Low LPL cbl LH		Weight -	
Drawing Nr. 24895108		Scale not in scale	
Business Unit SALES - 12		Level R01	
Sheet 1 / 1			