

SALES

Level	Zone	ECI Nº.	Revision note	Date	Designed	Checked

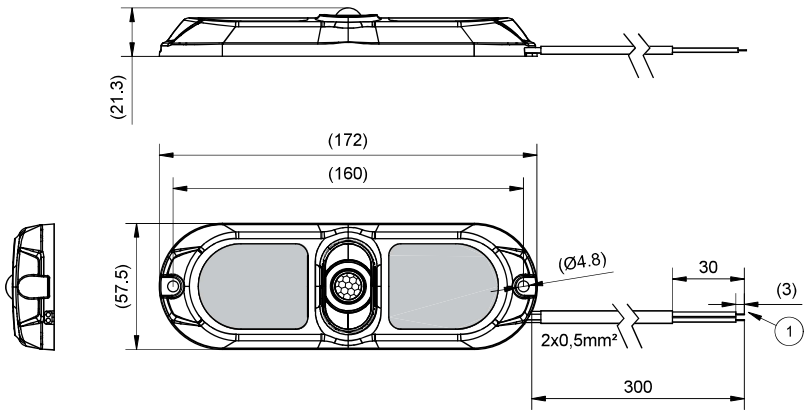

single wires	1
function	**wire colour**
Masse *GND*	weiss *white*
+VDC *+VDC*	braun *brown*

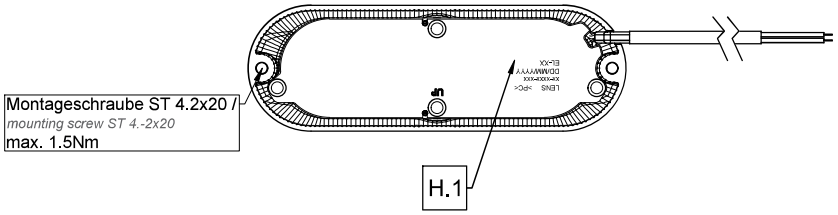

Electrical Specification				
Funktion *Function*	**Nennspannung** *Nominal Voltage*	**Spannungungsbereich** *Voltage Range*	**Nennstrom** *Nominal Current*	**Nennleistung** *Nominal Power*
	Volt (V)	**Volt (V)**	**Ampere (A)**	**Watt (W)**
Inpoint IV long	12V / 24V	10V - 33V	0.73A / 0.34A	8.5W

Zubehör / *accessories*:	
1 Stk. *1 pcs.*	PE-Sack mit Schrauben ST4.2x20 *Plastic bag with screw ST 4.2x20*

Homologation description				
H.1	E9 23250	10R 07		

IP6K7

CP_03-0_Bemaßungsrichtlinie ( ) Auxiliary dimension DIN 406-10 Theoretical dimension ISO 1101
Test dimension (SPC) [ ] Unfinished dimension DIN 406-10 Surface quality ISO 1302

Designed by	Checked by	Approved by	
Wetzlmaier Gerlinde 2026/07/21	Leidinger Sabine 2026/07/27	Grininger David 2026/08/18	ASPÖCK Design Engineering APPROVED

ASPÖCK SYSTEMS

Designation Inpoint IV long 0,3m OE PIR

Project number 1251

Drawing Nr. 39894401

Business Unit SALES - 12

Tolerance CP_04-2_Toleranzen Verkabelungsprodukte

Weight -

Scale not in scale

Dimensions in mm

Part Number 39-8944-017

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication there of to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.

Level R01

Sheet 1 / 1